

FEATURES



- Solid brass construction for durability and reliability
- Single lever handle allows for both ON/OFF activation and temperature setting
- Floor-mount installation
- 11-7/8" (302 mm) spout reach
- 8 gal/min (30 l/min) flow rate
- Integral valve
- Includes hardware kit and escutcheon
- Complements the One collection

CODES/STANDARDS APPLICABLE

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- ASSE 1014

P24418

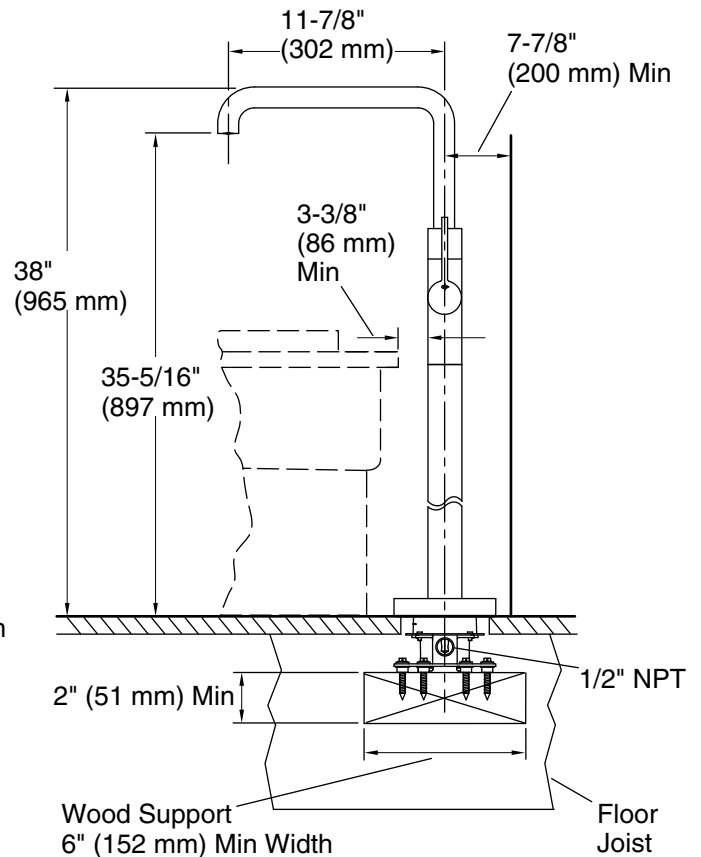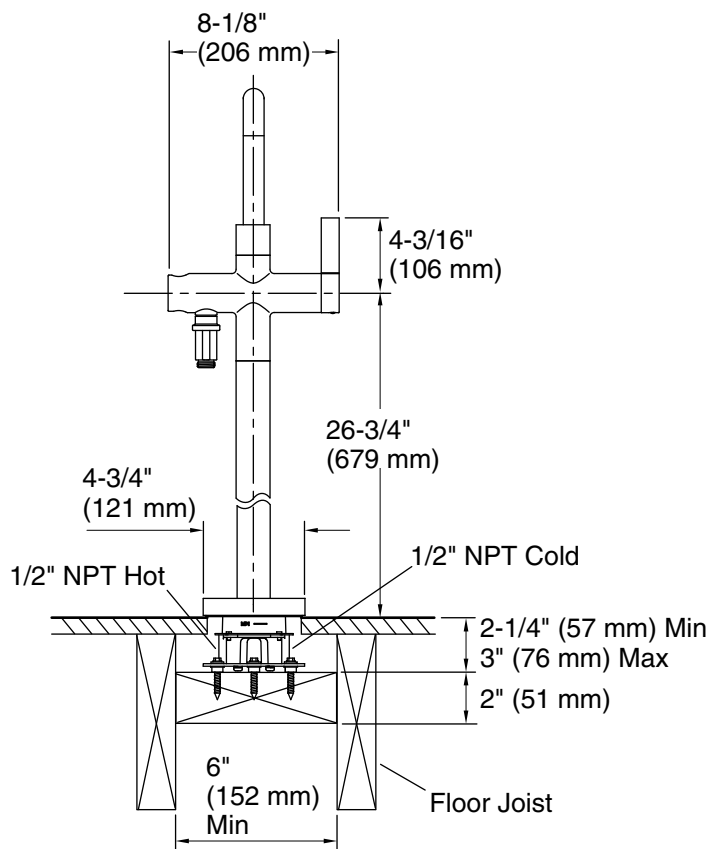

SPECIFIED MODEL

Model	Description	Finishes		
P24418-00	One Floor-Mount Bath Filler	<input type="checkbox"/> CP Polished Chrome	<input type="checkbox"/> AD Nickel Silver	<input type="checkbox"/> AG Brushed Nickel
		<input type="checkbox"/> GN Gunmetal	<input type="checkbox"/> ULB Unlacquered Brass	* <input type="checkbox"/> BL Matte Black
Required Accessories				
P24843-00	One Wand Dual-Function Handshower	<input type="checkbox"/> CP Polished Chrome	<input type="checkbox"/> AD Nickel Silver	<input type="checkbox"/> AG Brushed Nickel
		<input type="checkbox"/> GN Gunmetal	<input type="checkbox"/> ULB Unlacquered Brass	* <input type="checkbox"/> BL Matte Black
P21660-00	Contemporary Multi-Function Handshower	<input type="checkbox"/> CP Polished Chrome	<input type="checkbox"/> AD Nickel Silver	<input type="checkbox"/> AG Brushed Nickel
		<input type="checkbox"/> GN Gunmetal	<input type="checkbox"/> ULB Unlacquered Brass	* <input type="checkbox"/> BL Matte Black
P20511-00	Multi-Faucet Mounting Block	<input type="checkbox"/> NA		

* BL Matte Black available Winter 2019

We reserve the right to make revisions without notice in the design of products or in packaging unless this right has specifically been waived at the time the order is accepted.